



# APEX XQ50 / LRF XQ50

Thermal Sights





## Reticle Catalogue

### Notice

The values of the reticles indicated in this catalogue are correct in the following cases:



- when the magnification of the scope is set to minimum
- when "picture in picture" is activated

## D50i

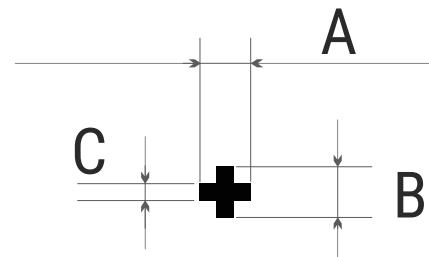



Reticle parameters	MOA / cm @ 100 m
Section A	2.1 / 6.1
Section B	2.1 / 6.1
Section C	0.7 / 2.0

## H50i

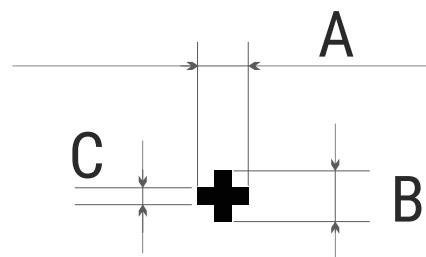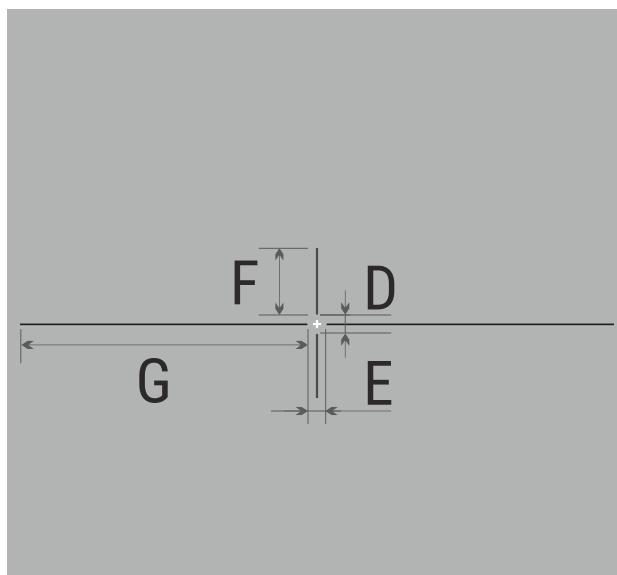



Reticle parameters	MOA / cm @ 100 m
Section A	2.1 / 6.1
Section B	2.1 / 6.1
Section C	0.7 / 2.0
Section D	4.9 / 14.3
Section E	4.9 / 14.3
Section F	18.2 / 52.9
Section G	78.4 / 228

# M50i

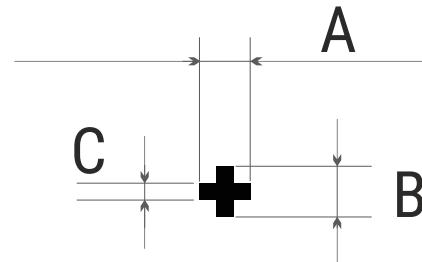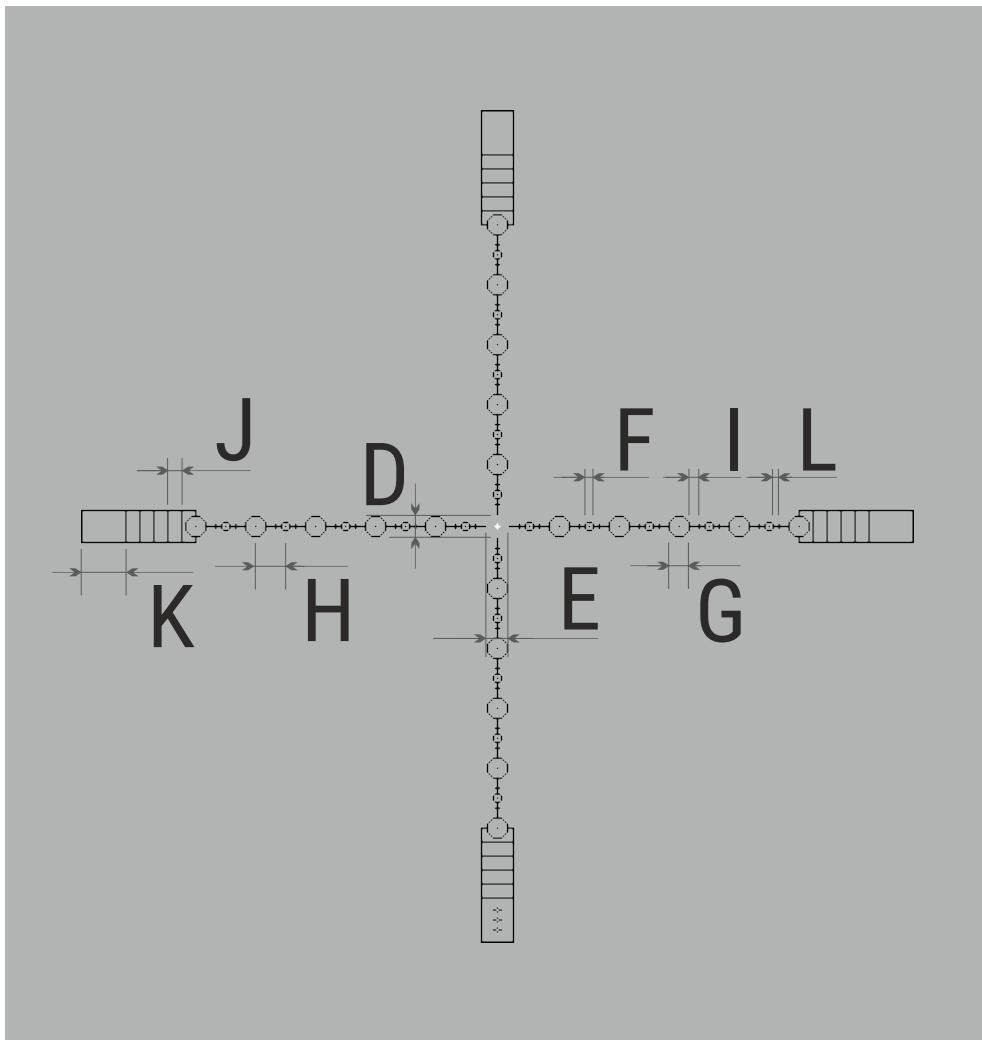



Reticle parameters	MOA / cm @ 100 m
Section A	2.1 / 6.1
Section B	2.1 / 6.1
Section C	0.7 / 2.0
Section D	7.7 / 22.4
Section E	7.7 / 22.4
Section F	3.5 / 10.2
Section G	7.7 / 22.4
Section H	10.5 / 30.5
Section I	3.5 / 10.2
Section J	4.9 / 14.3
Section K	15.4 / 44.8
Section L	2.1 / 6.1

# M52i

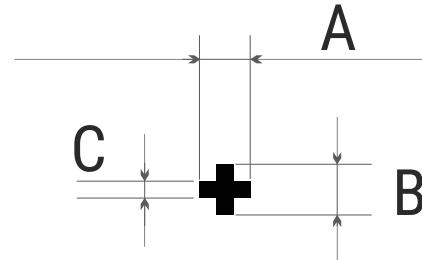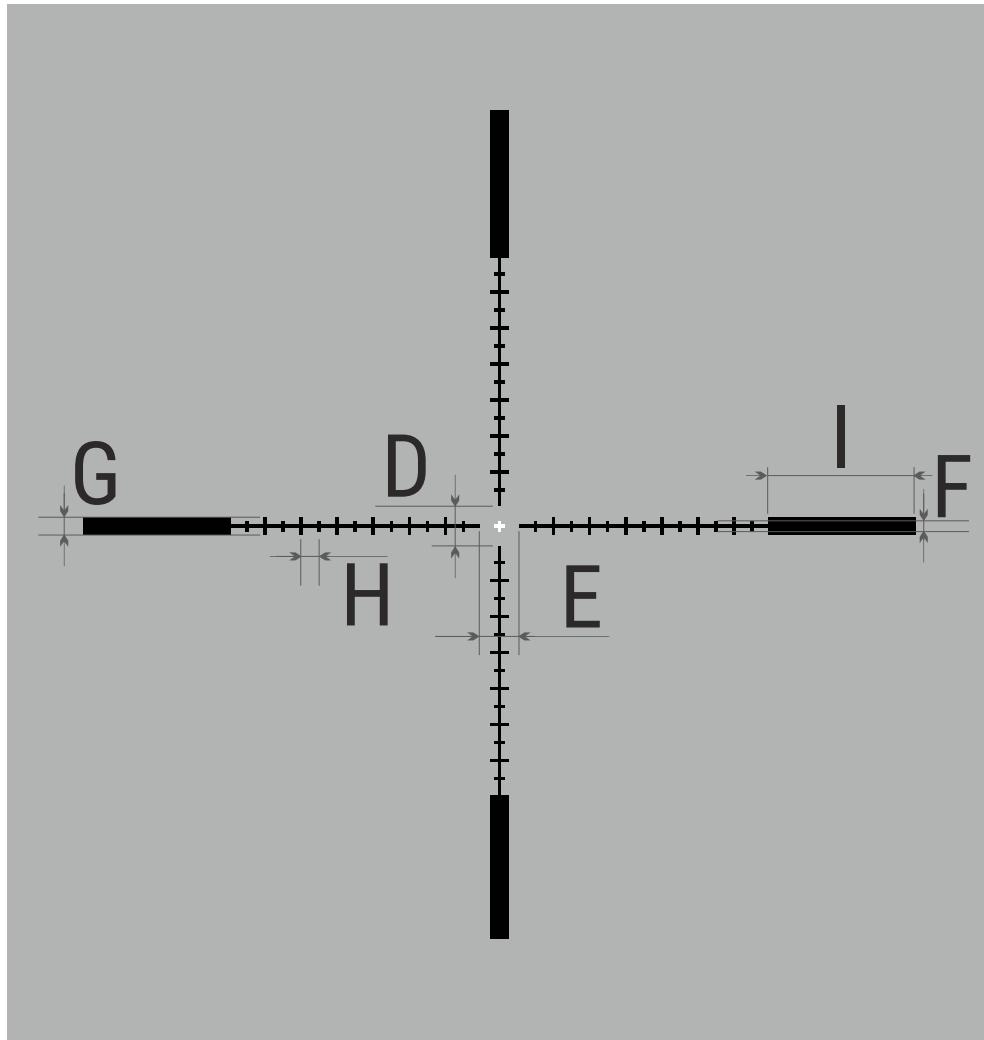



Reticle parameters	MOA / cm @ 100 m
Section A	2.1 / 6.1
Section B	2.1 / 6.1
Section C	0.7 / 2.0
Section D	7.7 / 22.4
Section E	7.7 / 22.4
Section F	2.1 / 6.1
Section G	3.5 / 10.2
Section H	3.5 / 10.2
Section I	28.7 / 83.5

# M54i

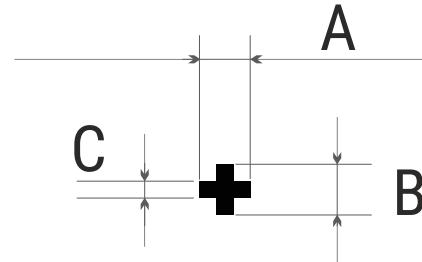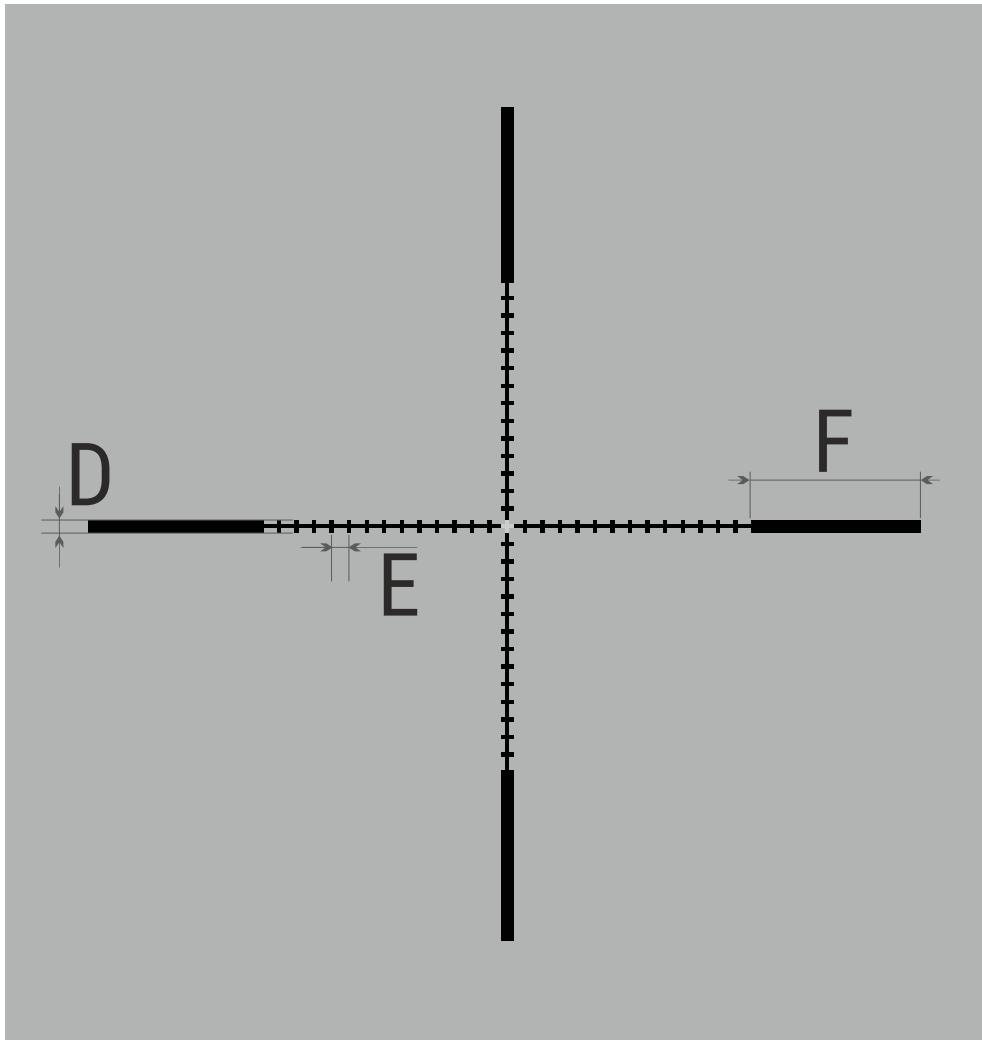



Reticle parameters	MOA / cm @ 100 m
Section A	2.1 / 6.1
Section B	2.1 / 6.1
Section C	0.7 / 2.0
Section D	2.1 / 6.1
Section E	3.5 / 10.2
Section F	28.7 / 83.5

# T50i

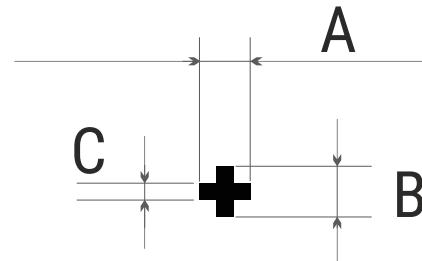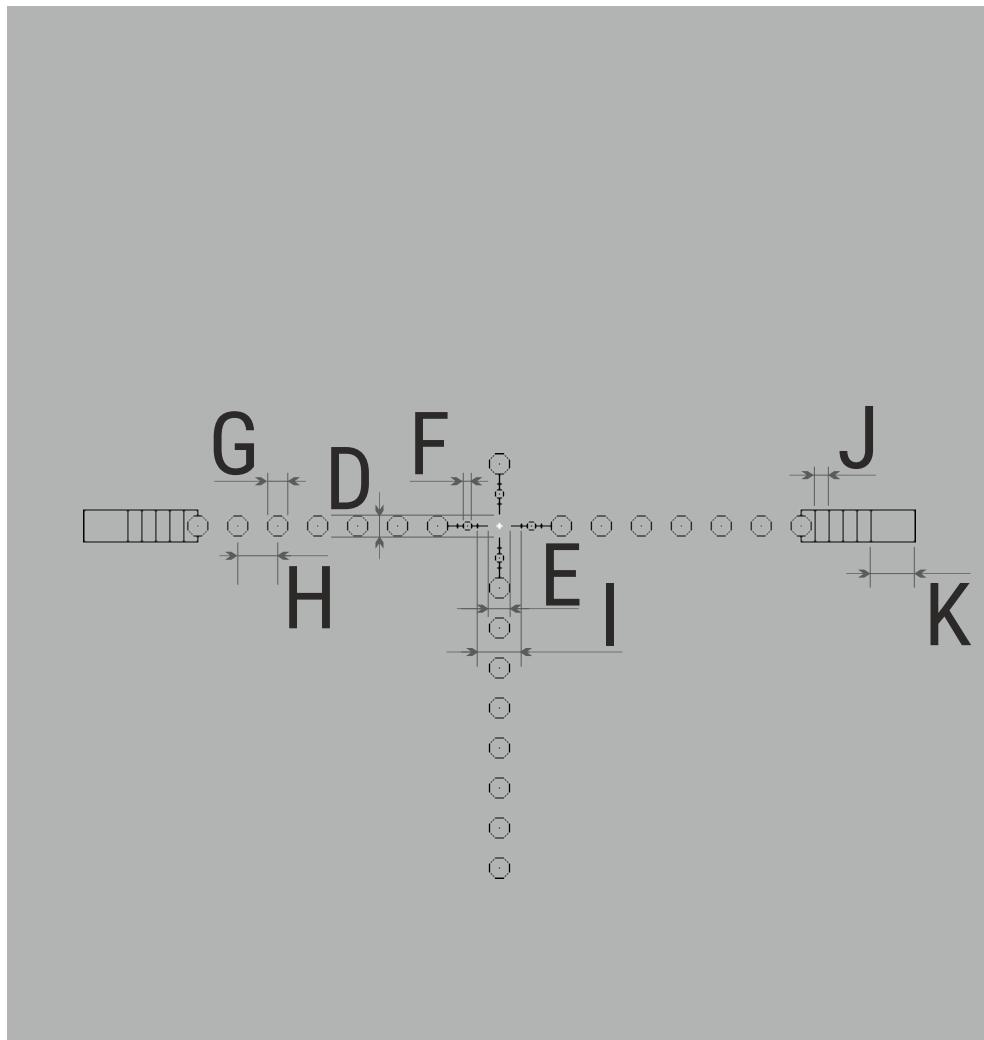



Reticle parameters	MOA / cm @ 100 m
Section A	2.1 / 6.1
Section B	2.1 / 6.1
Section C	0.7 / 2.0
Section D	7.7 / 22.4
Section E	7.7 / 22.4
Section F	3.5 / 10.2
Section G	7.7 / 22.4
Section H	14 / 40.7
Section I	15.4 / 44.8
Section J	4.9 / 14.3
Section K	15.4 / 44.8

# T51AI

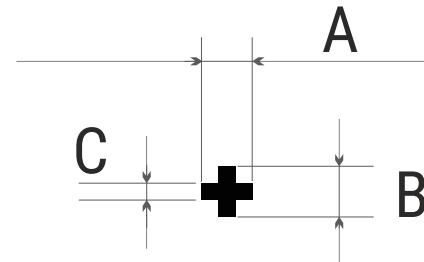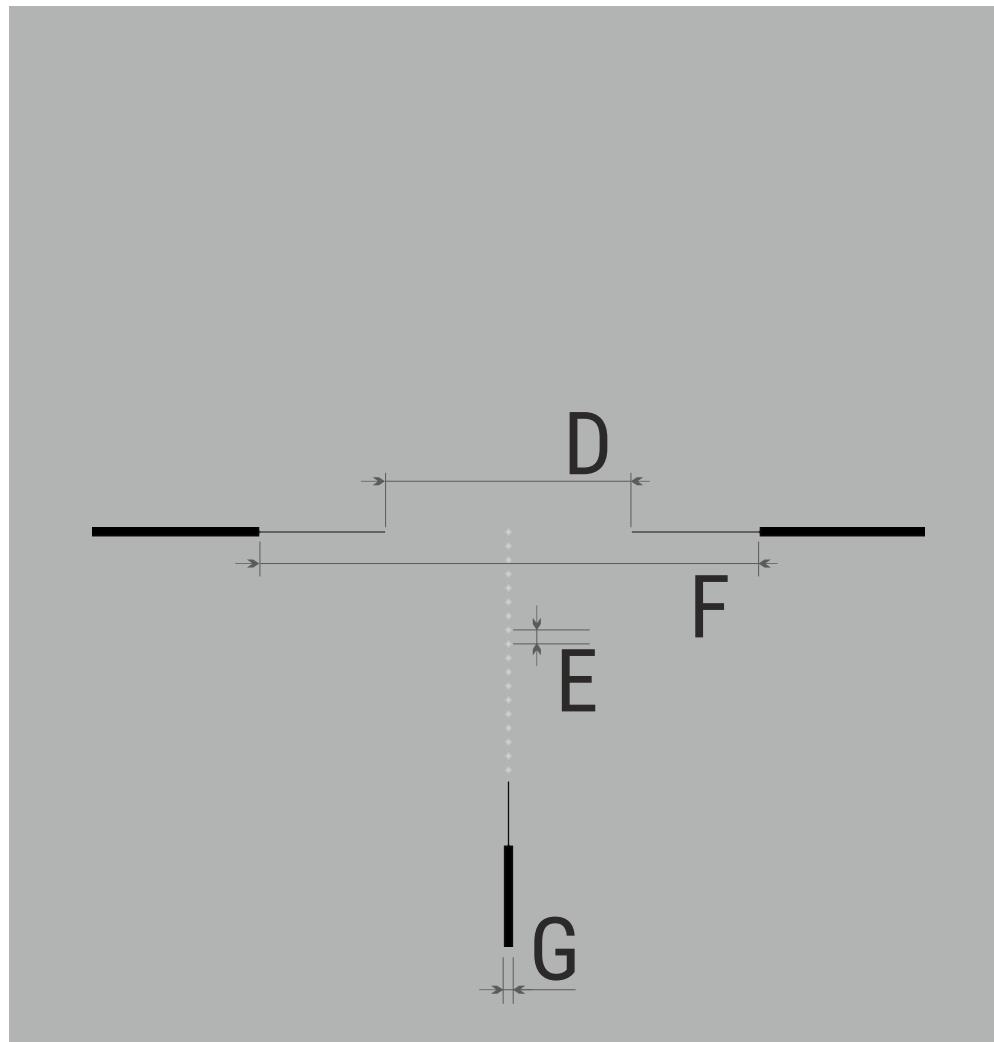



Reticle parameters	MOA / cm @ 100 m
Section A	2.1 / 6.1
Section B	2.1 / 6.1
Section C	0.7 / 2.0
Section D	86.1 / 250.4
Section E	7.0 / 20.4
Section F	174.9 / 509
Section G	3.5 / 10.2

# T52i

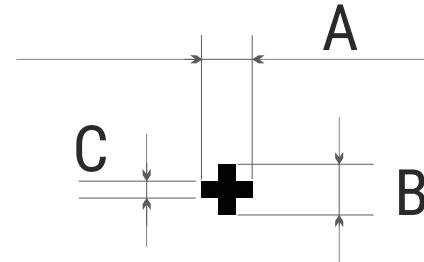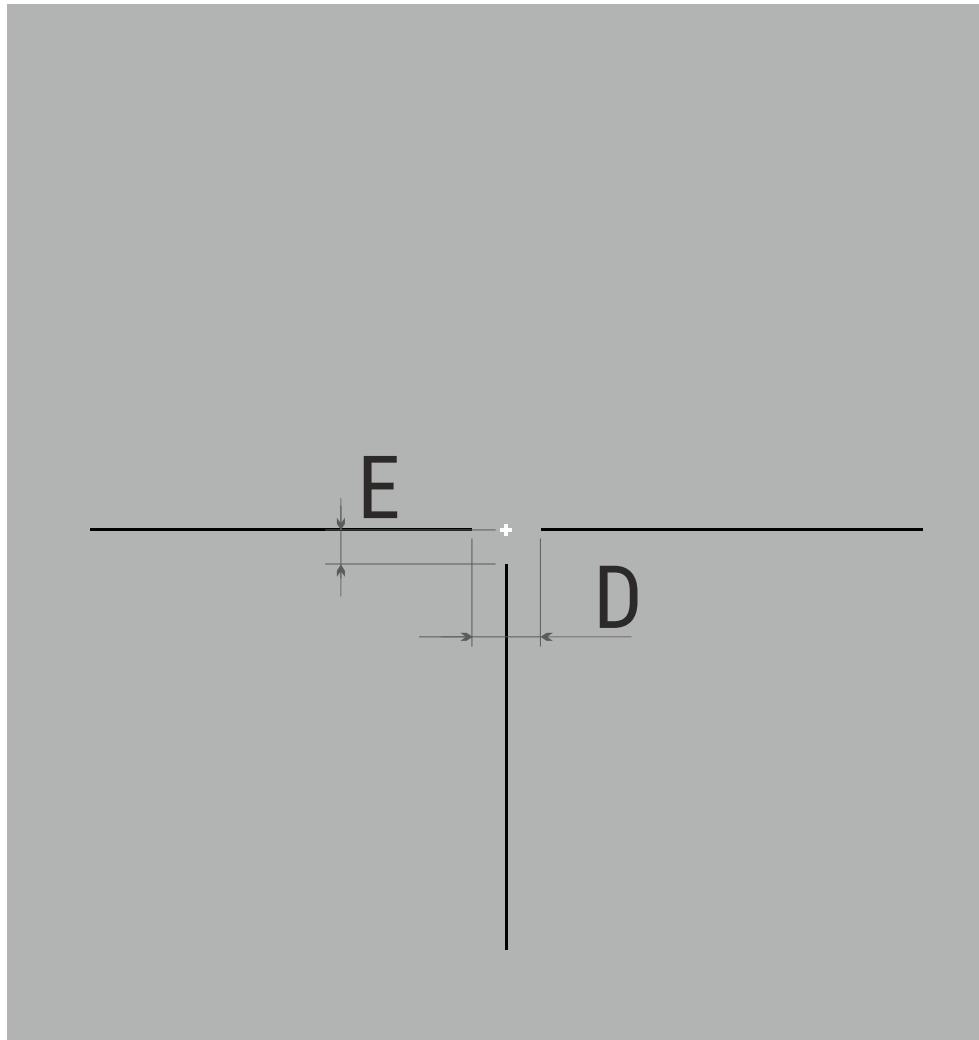



Reticle parameters	MOA / cm @ 100 m
Section A	2.1 / 6.1
Section B	2.1 / 6.1
Section C	0.7 / 2.0
Section D	13.3 / 38.7
Section E	6.3 / 18.3

# X50i

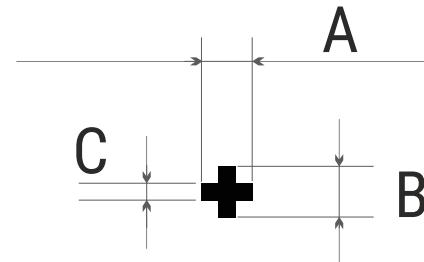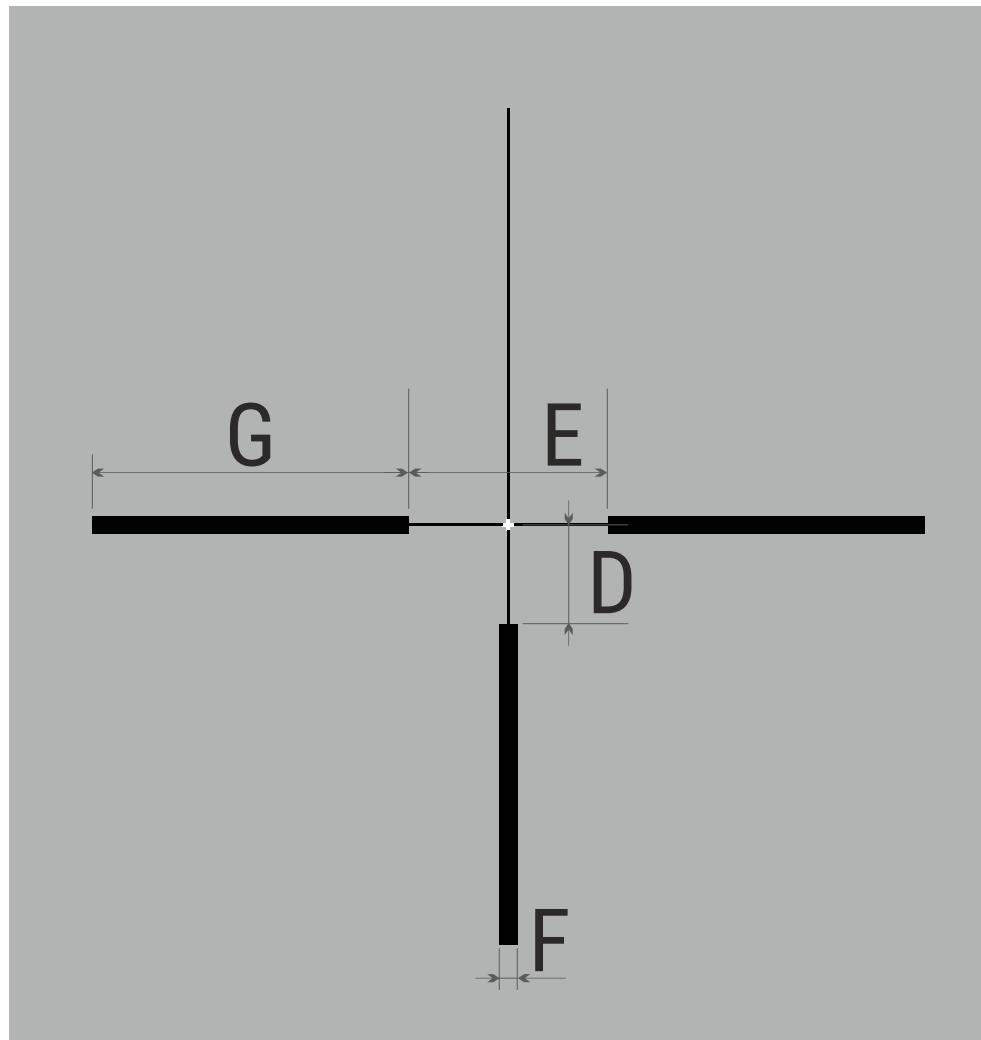



Reticle parameters	MOA / cm @ 100 m
Section A	2.1 / 6.1
Section B	2.1 / 6.1
Section C	0.7 / 2.0
Section D	19.6 / 57
Section E	38.5 / 112
Section F	3.5 / 10.2
Section G	61.6 / 179.2

# X51i (X51i-150)

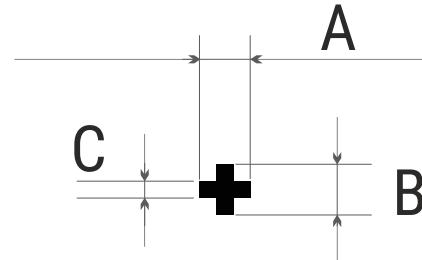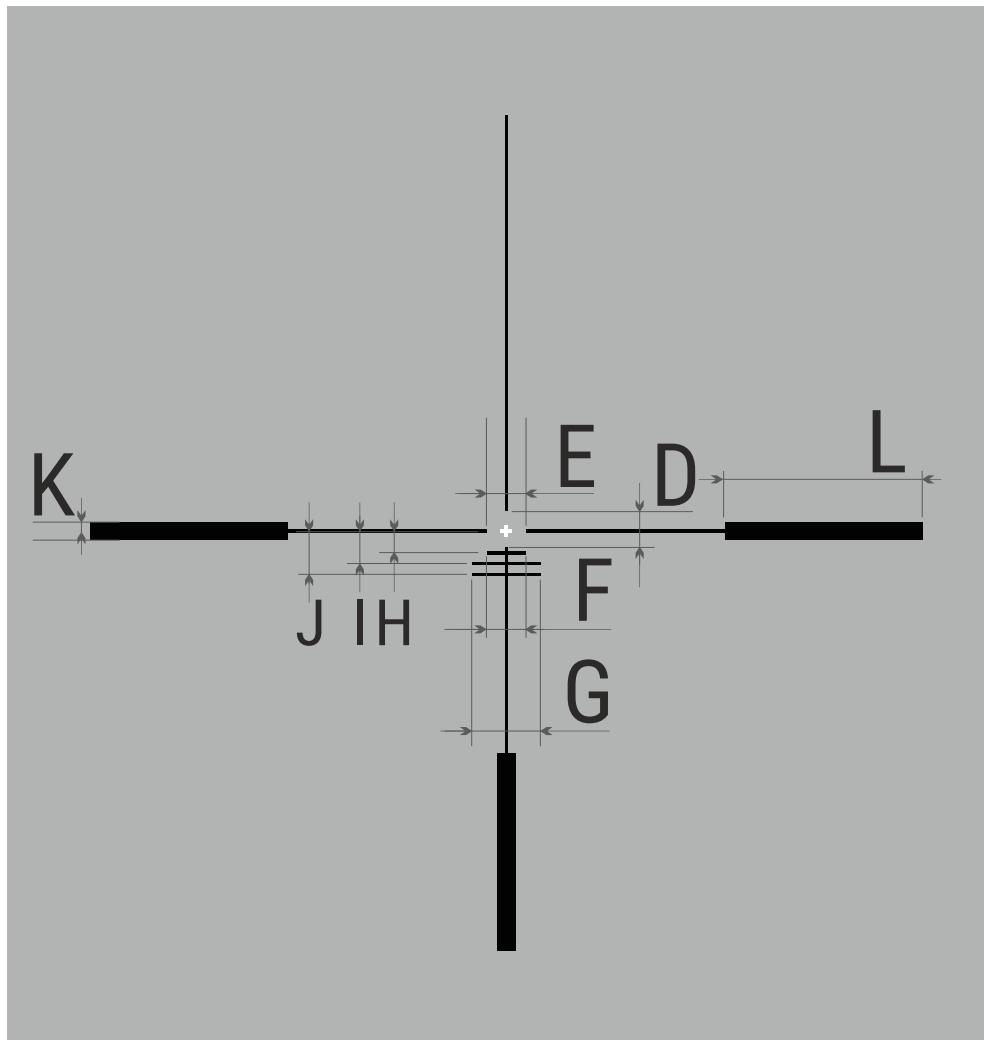



Reticle parameters	MOA / cm @ 100 m
Section A	2.1 / 6.1
Section B	2.1 / 6.1
Section C	0.7 / 2.0
Section D	7.7 / 22.4
Section E	7.7 / 22.4
Section F	9.1 / 26.5
Section G	17.5 / 50.9
Section H	6.3 / 18.3
Section I	9.1 / 26.5
Section J	12.6 / 36.6
Section K	3.5 / 10.2
Section L	38.5 / 112

**X52i**

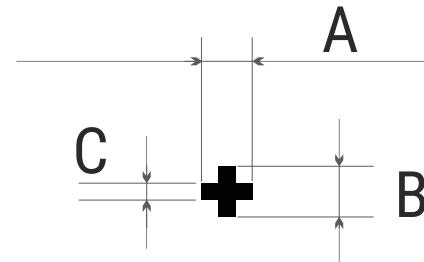



Reticle parameters	MOA / cm @ 100 m
Section A	2.1 / 6.1
Section B	2.1 / 6.1
Section C	0.7 / 2.0

# X53i

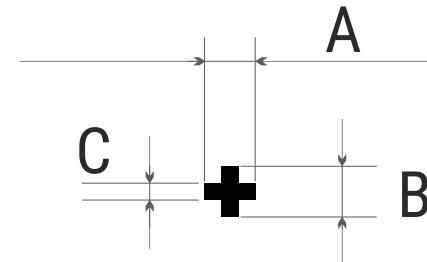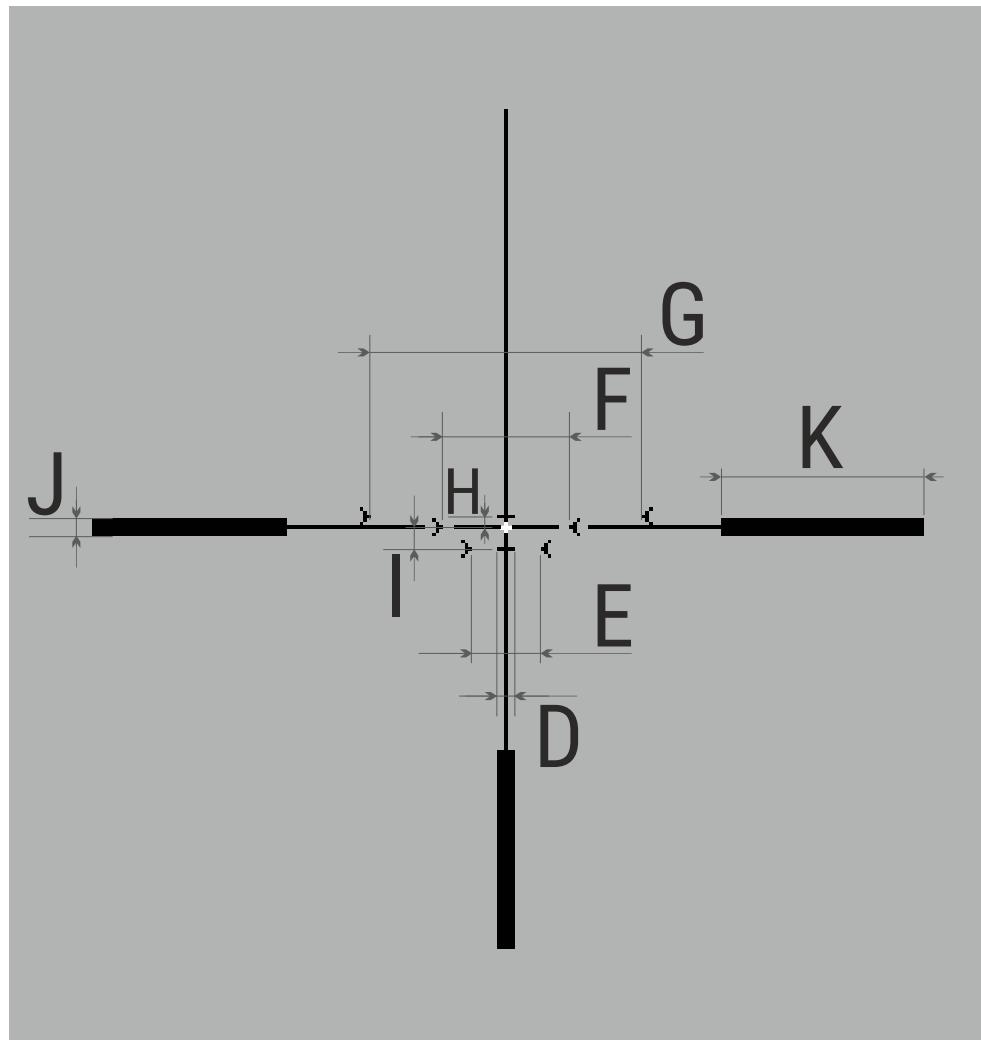

Reticle parameters	MOA / cm @ 100 m
Section A	2.1 / 6.1
Section B	2.1 / 6.1
Section C	0.7 / 2.0
Section D	4.9 / 14.3
Section E	17.5 / 50.9
Section F	34.3 / 99.8
Section G	70.7 / 205.6
Section H	3.5 / 10.2
Section I	6.3 / 18.3
Section J	3.5 / 10.2
Section K	37.8 / 109.9

# X54i

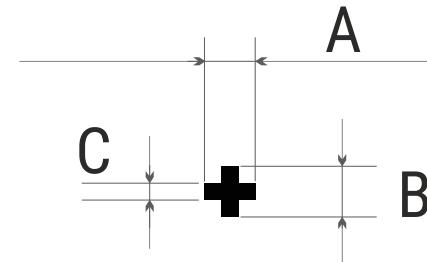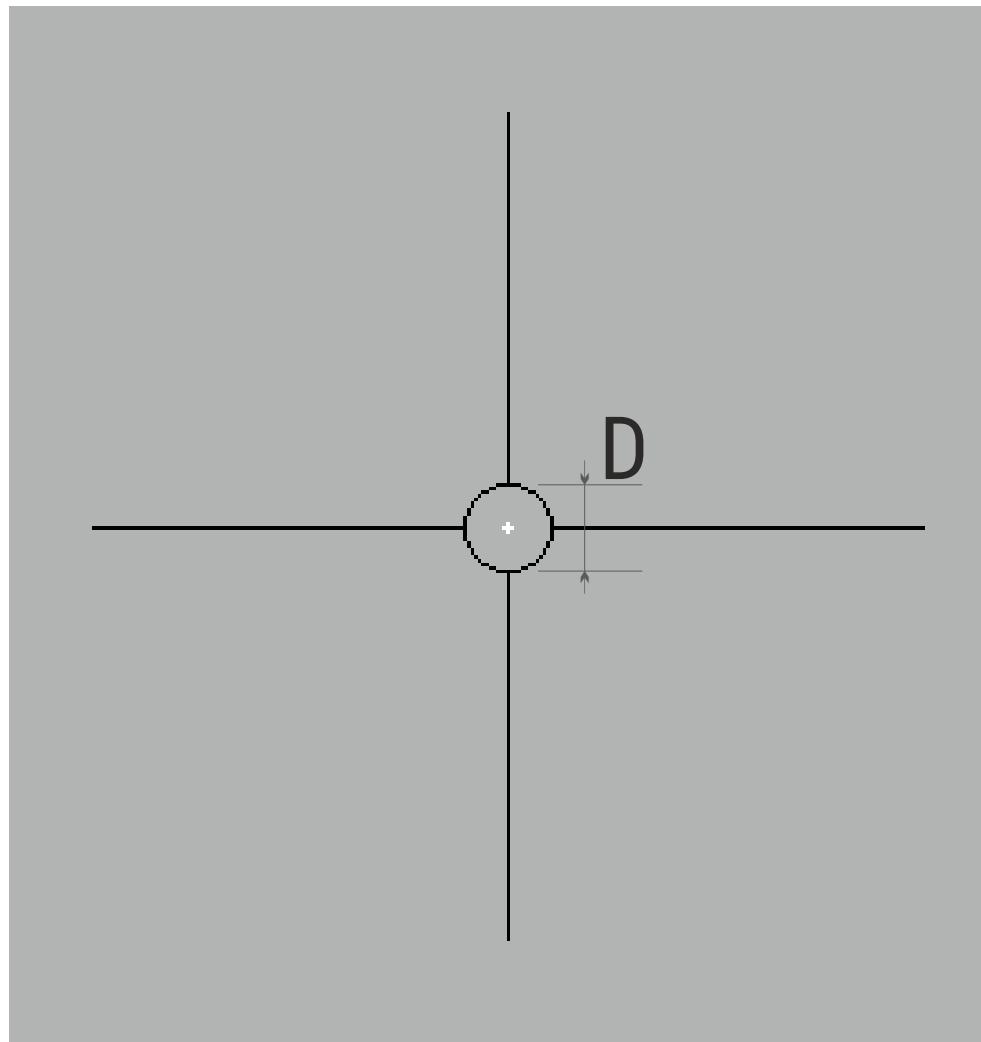

Reticle parameters	MOA / cm @ 100 m
Section A	2.1 / 6.1
Section B	2.1 / 6.1
Section C	0.7 / 2.0
Section D	15.5 / 50.9